




Environment	Indoors and outdoors
Drive system	Screw-driven
Rated load	Up to 460 kg / 5 persons
Speed	0.15 m/sec (9 m/min)
Travel height	Up to 15 metres
Landings	Up to 6
Platform dimensions (X x Y, mm)	1100 x 1400 1070 x 1485 <small>*available custom dimensions</small> 1150 x 1485
Shaft dimensions (M x N, mm)	1500 x 1460 1460 x 1540 1540 x 1540
Door clearance (width x height, mm)	900 x 2000 (with 1100 x 1400 platform) 940 x 2000 <small>*available other dimensions</small>
Gate (width x height, mm)	900 x 1300 (with 1100 x 1400 platform) 940 x 1300
Door configuration	Right or left swing door, double swing door up to 3 doors per landing
Shaft walls	Aluminium profiles with glass or steel panels
Standard colors <small>*any RAL color available as option</small>	RAL 9006 (light grey aluminum) RAL 9010 SPECIAL PRICE RAL 9005 SPECIAL PRICE
Soft start/stop	Comes as a standard
Power supply	1 ph 25A, 3 ph 16A
Motor	2.2 kW 3 kW
Noise level	Less than 70 dB
Control system	Modern digital control system with LCD display
Technical safety equipment	Safety edge around the the platform, emergency STOP buttons, electronic speed control, overload detector, opening control of doors and locks, electronic control of engine performance

Certificate issued on the following requirements:
Machinery directive 2006/42/EC
EN 81-41:2010, EN 81-58:2018, EN 81-20:2020

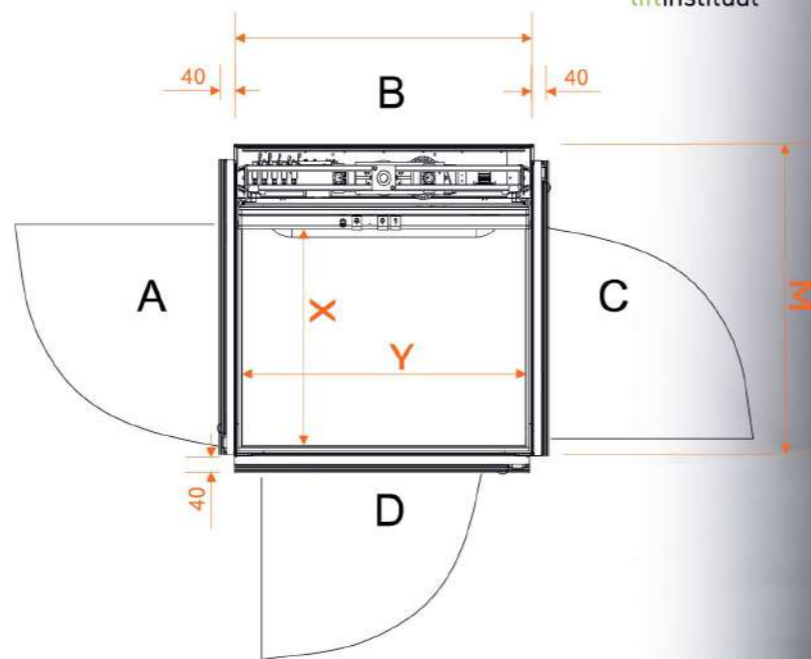

barduva

SB200 Home Lift



Barduva, JSC
Beržuonos str. 2, LT-02121 Vilnius, Lithuania
00 370 5 231 0770 (Phone)
sales@barduva.eu
www.barduva.eu

MADE IN EU

SB200

Home Lift



SB200 is a screw driven vertical platform lift assembled using high quality materials and designed to meet the characteristics of ultimate performance and outstanding aesthetics. It is designed to use in private houses, cottages and apartment buildings.

SB200 can be installed into existing shaft or it's own shaft which is constructed of special multilayered steel sandwich type panels or glass panels.


A maximum of three doors may be installed on each floor with either left or right swing. The doors on the top floor stop may be designed in the form of gates. This type of construction looks

aesthetic and modern and gives a clear view of the surroundings.

A uniformly backlit control panel, with a comfortable handle below, contains large buttons with embossed symbols at a convenient height for accessing from sitting or standing positions. A backup power source ensures that the elevator can be used to evacuate people from it, in the event of a power outage.

You can make your own lift solution by choosing from wide variety of accessories and options, such as different lighting, door openers, comfort equipment.

SB200 PLATFORM LIFT WILL ADVANCE YOUR HOME

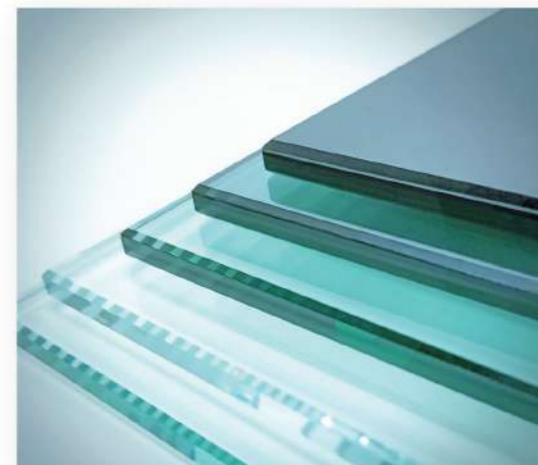

DIFFERENT DOOR TYPES

Gates; Aluminum with glass; With Impost; Aluminum; Fire proof EI60; Fire proof EW60 – with a small window.



PANELS

Platform lift shaft can be assembled using multi-layered sandwich panels and laminated glass panels.



OPTIONS

- Automatic door openers
- Additional floor indicators
- Automatic emergency lowering
- LED lighting
- Extra lighting options
- Voice announcer
- Floor indicator on the platform or landing
- Ramp
- Phone on the platform
- AUTODAILER
- Access restriction options



AUTOMATIC DOOR OPENERS

Internal or external door openers opens and closes the door automatically after a preset time. Can be ordered as option.



FLOORING

Lift platform floor can be covered with different colour rubber or desired texture vinyl.



COLOUR CUSTOMISATION

The whole lift can be painted in almost any colour to suit your taste and environment. You can choose from hundreds of RAL palette colours available.

